



REACTOR™ SPRAY FOAM AND POLYUREA EQUIPMENT

For fast-set plural-component applications



PROVEN QUALITY. LEADING TECHNOLOGY.

AEMCO

+966 -11- 21 40 888
marketing@aemco-llc.com
www.aemco-llc.com

جده الدمام الرياض
Riyadh Dammam Jeddah



Genuine People
Genuine Spares
Genuine Service

GRACO HAS YOU COVERED

**No matter what the application,
Graco has the solution**

Whether you're spraying foam or applying polyurea coatings, Graco Reactor® Plural-Component Systems help you get the job done with superior results. Available in air, electric or hydraulic technology – we have the right equipment to meet your needs.

WHICH SYSTEM IS RIGHT FOR YOU?

Technology types: A = air; E = electric; H = hydraulic



**Portable and
Touch-up Systems**

SPRAY FOAM APPLICATIONS	COATINGS APPLICATIONS
E-10	E-10hp



**Entry-level
Systems**

SPRAY FOAM APPLICATIONS	COATINGS APPLICATIONS
A-25 E-20	A-XP1 E-XP1



**Mid-production
Systems**

SPRAY FOAM APPLICATIONS	COATINGS APPLICATIONS
E-30 H-30	E-XP2 H-XP2



**High-production
Systems**

SPRAY FOAM APPLICATIONS	COATINGS APPLICATIONS
H-40 H-50	H-XP3



GRACO HAS YOU COVERED

Performance charts with mix chamber choices

Use these charts to help identify the system that will work most efficiently with each mix chamber.

Flow rates are based on a material viscosity of 60 cps and a 50 Hz power line frequency.

How to use these charts

- Select spray pressure
- Select mix chamber or flow rate
- Choose equipment model

Note: Darker shading includes equipment models shown in lighter shaded areas.

Spray Foam Example

Mix chamber: AR6060 (03)
 Pressure: 85 bar (1250 psi)
 Flow rate: 10 kg/min (22 lb/min*)
Reactors H-30, E-30, H-40, H-50

Coatings Example

Mix chamber: AR2929 (00)
 Pressure: 105 bar (1500 psi)
 Flow rate: 3.4 l/min (0.9 gpm*)
Reactors E-XP1, E-XP2, H-XP2, H-XP3, E-10hp

*Output of flat tip will be slightly less than round equivalent

Applications

Spray Foam

- Residential & commercial wall insulation
- Aerospace
- Concrete lifting
- Rim and band joist
- Roof insulation


Protective Coatings

- Adhesive and caulking for flooring
- Decorative coatings
- Marine and shipbuilding
- Tank and pipe coating
- Waterproofing
- Wastewater treatment
- Truck bedliners


Electric unit performance curves are based on typical spraying conditions. Periods of continuous spraying or very high ambient temperatures reduce the performance envelop. Hydraulic system performance curves allow for continuous spray conditions.



SPRAY FOAM EQUIPMENT

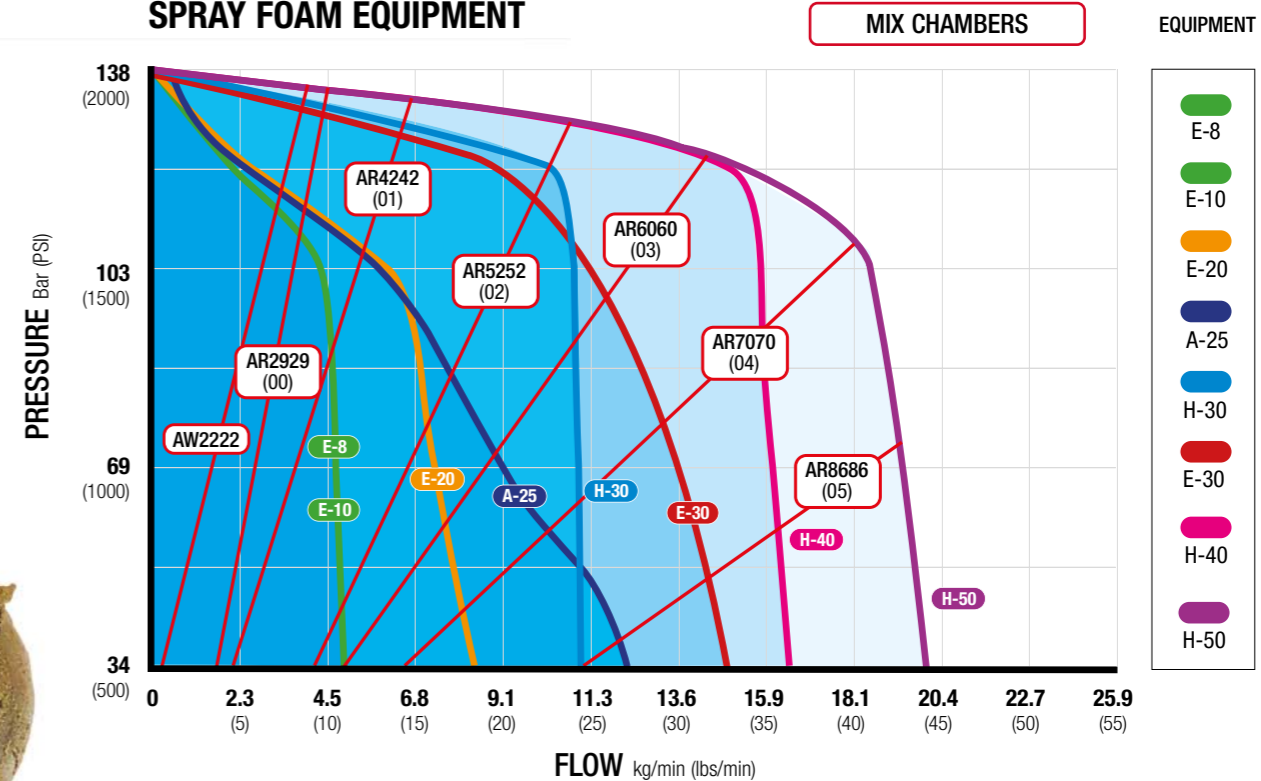

COATINGS EQUIPMENT

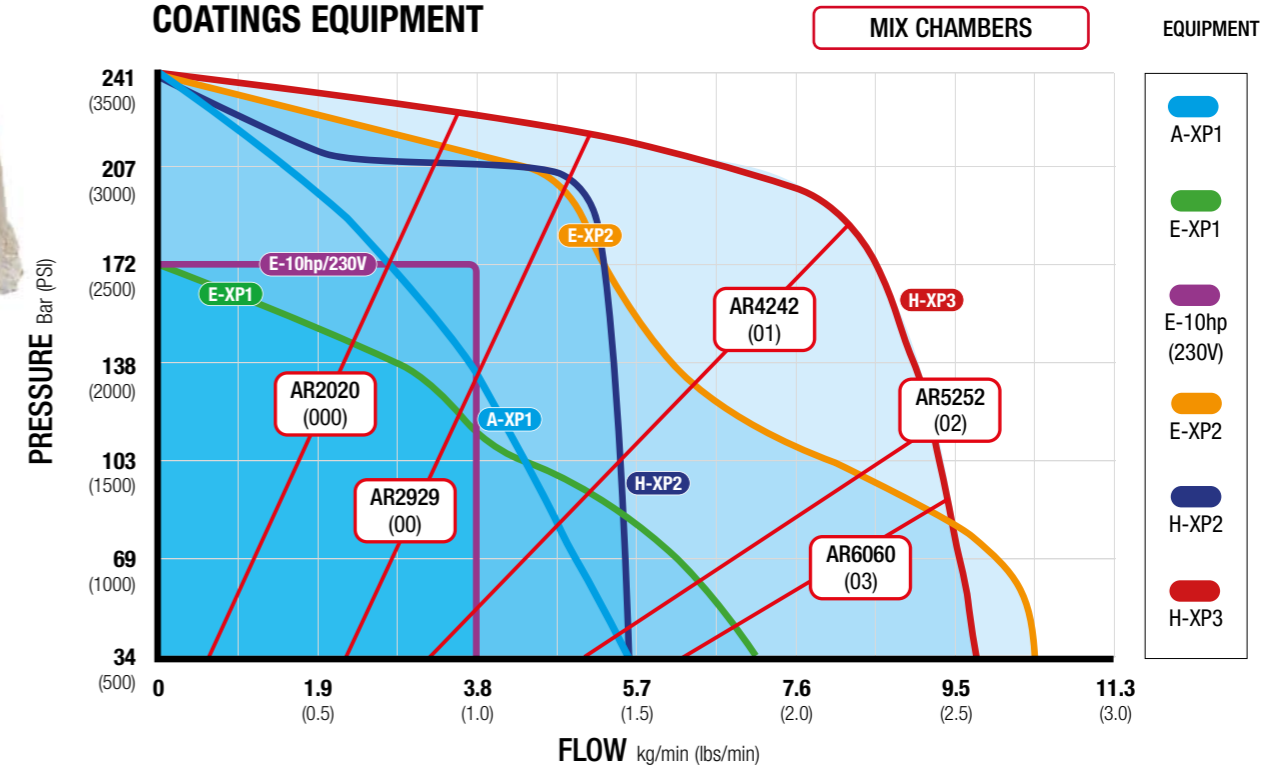

ADVANCING THE INDUSTRY

Like you, we want customers to be completely satisfied with their spray foam and coatings application investment. Graco's goal is to provide equipment advancements that help you and your crews apply materials more accurately and more efficiently – as the material suppliers intended, to help grow your business.

Better control



Advanced control technology

Advanced Display Module (ADM) is the standard interface for all Reactor 2 systems. With the ability to track, monitor and save project information, the ADM also has the ability to download data onto a USB drive for further analysis

Screen shown:

Drum fluid levels – easy indication when you are running low on chemical. One of many screens available on the ADM.

Easier to service

Try it now!



Reduce your downtime with QR codes

Error codes appear on your ADM with a helpful QR code. The QR codes explain the problem and provide solutions by simply scanning the code with your smart phone or device. The scan takes you directly to help.graco.com that provides up-to-date advanced trouble shooting information.

Peace of mind

Advanced electronics

Graco designed the electronics in the Reactor 2 systems to a stringent electronics reliability standard. These modules are more robust and able to withstand a wider range of power spikes or surges.



Sacrificial Surge Protector for added protection

As an added level of protection, Graco also added a sacrificial surge protector to Reactor 2 systems. If there is an excessive power spike, you only have to replace this smaller, less expensive part – not the entire control module. All Reactor 2 models include a spare sacrificial surge protector to get you back up and running immediately.




NEW REACTOR TECHNOLOGY

Ratio Assurance

Since no single method can easily and accurately detect all potential issues that may cause off-ratio foam or polyurea to be sprayed, Graco has designed a multi-tiered system with built in redundancies that will provide the best results in monitoring and maintaining on-ratio spraying.

A robust Ratio Control System is more than just flow meters:

- Mechanically linked pumps
- Inlet pressure monitoring
- Outlet pressure monitoring
- Flow meters

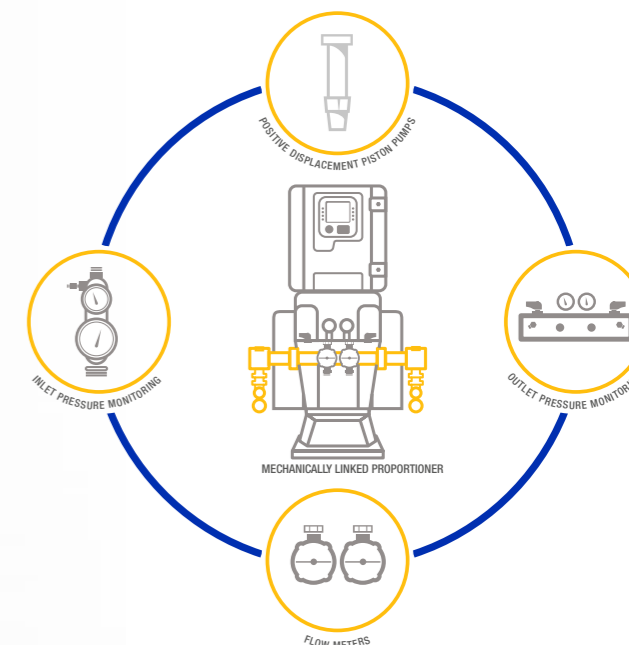

Ratio Assurance is now included with all new Reactor 2 elite models. Retrofit kits are available for any Reactor 2 model in the field.

For more information visit:

www.graco.com/ratioassurance

Reactor Connect

The Reactor Connect App lets you view your fleet and make real time adjustments to your proportioner all from your smartphone.

Sprayers:

- Control your Reactor 2 with your phone
- Save time when you're spraying. Adjust the Reactor without having to go back to your rig.

Owners/Managers:

- Monitor your rigs/crews with the multi-system dashboard
- Troubleshoot an issue quickly by being able to see real-time machine conditions
- Provide documentation to a customer that material was sprayed on-ratio to the manufacturers specs
- Use reports to better understand your business, your equipment and your employees
- Have your spray data saved to the cloud

For more information visit:

www.graco.com/reactorapp
www.reactorconnect.graco.com



PORTABLE & TOUCH-UP SYSTEMS

WHAT PORTABLE & TOUCH-UP SYSTEMS CAN DO FOR YOU:

- **Save time** – get smaller jobs done fast without sacrificing performance
- **Self-contained system** – no transfer pumps required
- **Easy to use** – single knob motor operations
- **Provides consistency** – uses standard spray guns you're familiar with

REACTOR E-10

Save up to 30% on material costs compared to disposable foam systems

Reactor E-10 sprayers are ideal for plural-component spray, joint-fill jobs and touch-ups. One person operation saves time and money!



Intuitive Controls

- Easy start and stop
- Digital temperature display

Heater and Hose

- Gives up to 2000 watts to pre-heat circulating material

Electric Motor

- Improved performance
- Reduces operating costs


Power

- Electric power is a low draw and plugs into standard outlets

REACTOR E-10HP

Fast start-up time for improved productivity

Expand your business with polyurea applications. The Reactor E-10hp sprayer is a smart, affordable investment that will help grow your business. Even though it's an entry level system, it packs plenty of power and uses standard residential electrical outlets – no generator is needed.

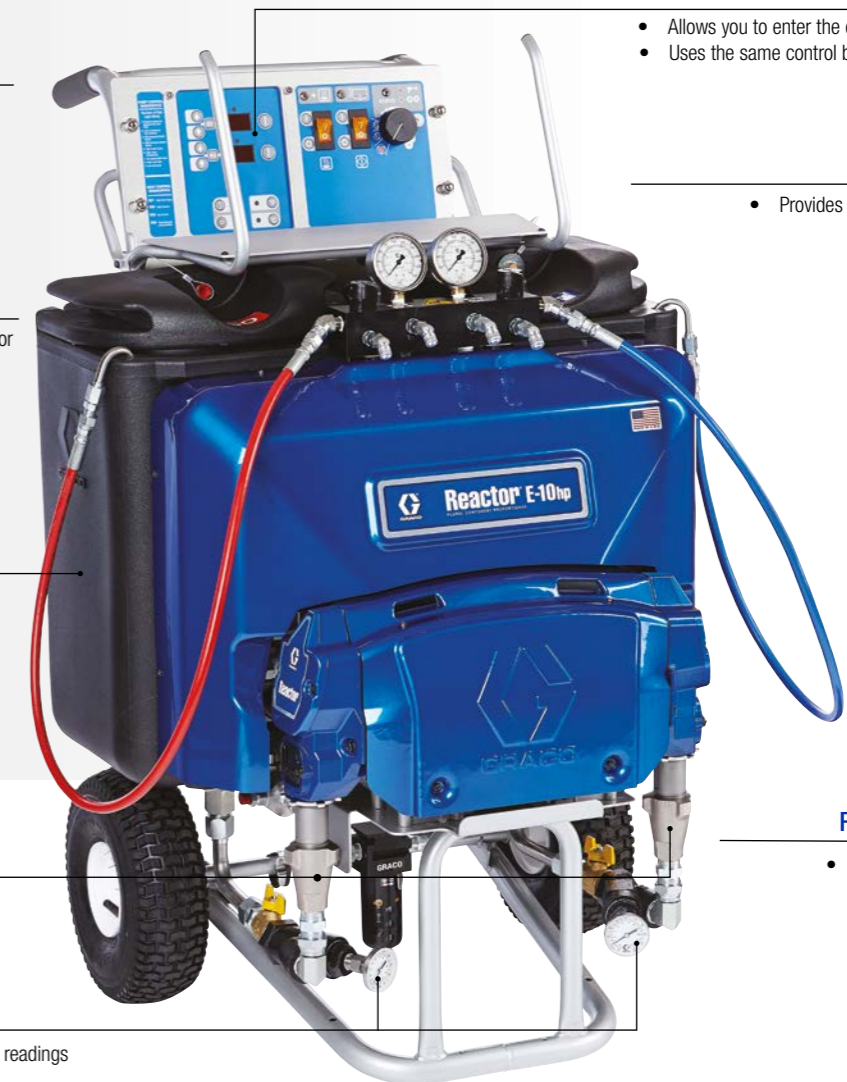

Low Level Sensors

- Indicates when material is low (3.8 L / 1 gal remaining)
- No contact with materials – prevents build-up

Boost Heat

- Directs unused power from the motor circuit to additional heater rods
- Additional heater power brings material to desired temperatures faster during recirculation mode

Insulated Tanks

- Double-wall insulated to retain heat
- Smooth interior lining for easy cleaning
- Improved seal design on lid for better moisture control

Quick knockdown Lower Pumps

- Easy disassembly and maintenance

Temperature Gauges in Y-strainers

- Provides accurate tank temperature readings

Digital Heat Controls

- Allows you to enter the exact temperatures you need
- Uses the same control boards as a standard Reactor

Motor

- Provides improved spray performance with reduced pressure drop

Robust Hybrid Heater

- More power, faster material handling means more uptime

ENTRY LEVEL SYSTEMS

WHAT AN ENTRY LEVEL SYSTEM CAN DO FOR YOU:

- **Easy to manoeuvre** – wheeled carts let you get closer to the job
- **Easy to use** – best for low to medium-output applications
- **Affordability** – excellent value for residential and commercial use

REACTOR E-20 & E-XP1

Durability you've come to expect

Equipped with material data and system diagnostics, the Reactor E-20 and E-XP1 systems provide total control for spraying foam insulation and coatings.

Reliability

- Powerful hybrid heaters
- Accurate heating with precise temperature sensing

Heater Control Boards

- Longer-lasting modular heater
- Minimize downtime

Hose Heat Transformer

- Does not require tap settings



Simple Control

- Digital heat and pressure controls

Pumps

- Quick knockdown for easy maintenance

REACTOR A-25 & A-XP1

Best choice for affordability

The Reactor A-25 and A-XP1 system has the ability to maintain consistent temperature control, even when you're spraying at maximum flow rates – resulting in better quality foam or coatings. Have peace of mind with the proven durability of a standard Graco quality air motor.

Three Heat Zones

- Three independent heat zones – ISO, resin and hose heat
- Provide accurate heat control for reliable spraying to handle different chemical viscosities
- Digital temperature controls

Recirculation Manifold

- A quick, easy way to balance system pressures

Hybrid Heater

- Provides better temperature control



DataTrak™ Control

- Resettable counter tracks material usage

NXT® Air Motor

- Low air consumption for increased efficiency
- Muffler provides low operating noise levels
- Air valve provides smooth and rapid changeover

ISO Pump Lube System

- Prevents isocyanate crystallization on the pump seal and shaft

Quick Knockdown Pumps

- Allows for easy service
- Fast disassembly

MID-PRODUCTION SYSTEMS

WHAT AN ELECTRIC SYSTEM CAN DO FOR YOU:

- **Increase productivity** – plenty of power for most residential and commercial applications
- **Smooth and consistent spray pattern** – minimizes pressure fluctuations on pump changeover
- **Free up space in trailer or rig** – smaller footprint when compared to other spray systems

REACTOR 2 ELECTRIC SERIES

Proven reliability at an outstanding value

With proven reliability the Reactor 2 E-series is the industry's preferred system. Reactor 2 models are available as an E-30 and E-XP2. Additional mid-production models include the H-30 and H-XP2. These models and their details are found on page 14.



Advanced Controls

- Easy to operate Advanced Display Module interface
- Reactor Connect App included with all models

Ergonomic Set-up

- Electronics are above the pumps – comfortable working height for easier service
- 40% smaller footprint than traditional Reactor E-30

Brushless Electric Motor

- Improved control and performance
 - No maintenance needed
 - Longer life

Easy Troubleshooting Diagnosis

- Troubleshooting Y-strainer for analog temperature and pressure gauges
 - Inlet pressures and temperatures sensor are displayed and recorded on ADM and Reactor App


Resistance Control Mode

- Provides full hose temperature control without RTD cables or Fluid Temperature Sensor
 - Increased material yield and productivity
 - Less downtime and repair costs

Standard




Ratio Display

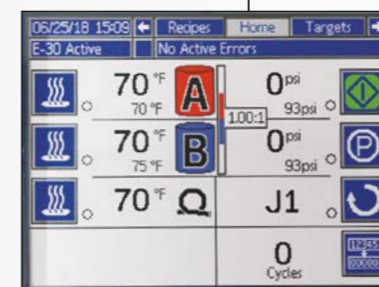

Reactor Smart Control

- RSC will automatically make adjustments to the Reactor to attempt to prevent off-ratio dispensing.
 - *only available for E-30 & E-XP2 models

ADM Set-up: System Screen

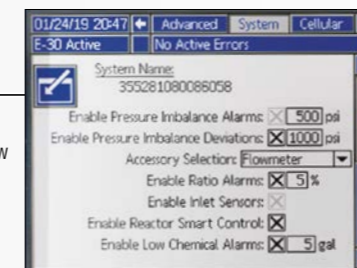

- Updated ADM set-up screen to allow easy configuration of flow meters and enabling alarms

Oval Gear Flow Meters

- Simple and robust design
- Ideally suited for high flow rate measurements
- Accuracy of ±1% once factory calibrated

Elite Models

- Flowmeters comes factory installed
- Inlet pressure and temperature sensors included
- Xtreme-Wrap™ Scuff Guard on heated hoses when ordered as a package



Elite

HIGH-PRODUCTION SYSTEMS

WHAT A HYDRAULIC SYSTEM CAN DO FOR YOU:

- **Dependability** – robust, durable, longest life spray system
- **Reduce downtime** – allows for longer time in between required maintenance
- **Increase daily productivity** – capable of extremely high duty cycle

REACTOR 2 HYDRAULIC SERIES

Highest value for the best performance

Graco's line of hydraulic Reactors brings increased yield and performance to high-output spraying. Ideal for in-plant OEMs or applicators that spray high volume. Reactor 2 stand-alone models are available in an H-30, H-40, H-50, H-XP2 and H-XP3.

Advanced Controls

- Easy to operate Advanced Display Module interface
- Reactor Connect App included with all models

Ergonomic Set-up

- Electronics are above the pumps – comfortable working height for easier service

Voltage Jumpers

- Available on H-30 and H-XP2 (Inside Electronics Cabinet) allows for one model to be wired to different voltages

Horizontal Pump Line

- Slower cycle rate

Easy Troubleshooting Diagnosis


- Troubleshooting Y-strainers for analog temperature and pressure gauges
- Inlet pressure and temperature is displayed and recorded on ADM and Reactor App

Reversing Sensors

- Non-contact for longer life

Consistent Design

- Similar footprint to traditional H-series

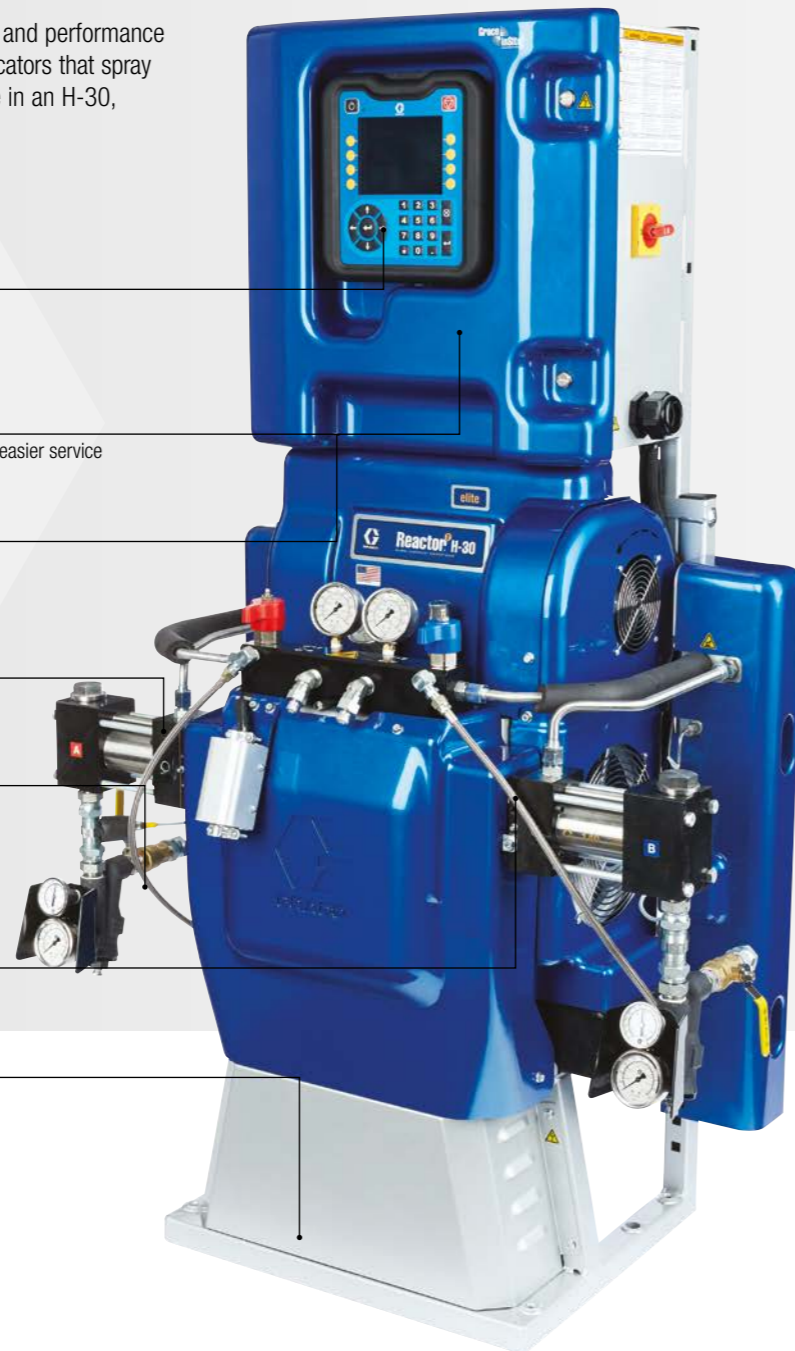

Elite Models

- Flowmeters come factory installed
- Inlet pressure and temperature sensors included
- Xtreme-Wrap™ Scuff Guard on heated hoses when ordered as a package

Oval Gear Flow Meters

- Simple and robust design
- Ideally suited for high flow rate measurements
- Accuracy of +/- 1%
- Included on elite models
- Kits available to add to all Reactor 2 models

Resistance Control Mode

- Provides full hose temperature control without RTD cables or Fluid Temperature Sensor
- Increased material yield and productivity
- Less downtime and repair costs



Elite

EQUIPMENT FOR SPRAY FOAM APPLICATIONS

Graco Has You Covered



MODEL	Electric (E Series)			
	Air (A Series) A-25	E-10	E-20	Reactor 2 E-30
Max Working Pressure	138 bar (2000 psi, 13.8 MPa) 800 l/min (28 scfm) air consumption@100 psi	138 bar (2000 psi, 13.8 MPa)	138 bar (2000 psi, 13.8 MPa)	138 bar (2000 psi, 13.8 MPa)
Min Working Pressure	N/A	N/A	N/A	N/A
Max Hose Length	64 m (210 ft)	32 m (105 ft)	64 m (210 ft)	94 m (310 ft)
Max Fluid Temp	88°C (190°F)	71°C (160°F)	88°C (190°F)	88°C (190°F)
Output	11.4 kg (25 lb)/min	5.4 kg (12 lb)/min	9 kg (20 lb)/min	13.6 kg (30 lb)/min
Weight	140.6 kg	Heated: 72 kg Unheated: 68 kg	155 kg	161 kg
Reactor Connect Compatible	No	No	No	Yes
Ordering Information	<p>With 6.0 kW heater: 262614</p> <p>*Amps 230V, 1-ph — 40A 230V, 3-ph — 32A 400V, 3-ph — 18.5A</p>	<p>With 1.7 kW heater: 120V, 2-cord 249570</p> <p>With 2.0 kW heater: 240V, 2-cord 249571</p> <p>240V, 1-cord 249572</p> <p>Unheated ambient system: 120V 249576</p> <p>240V 249577</p>	<p>With 6.0 kW heater: 230V, 1-ph — 48A 259025</p> <p>230V, 3-ph — 32A 259034</p> <p>400V, 3-ph — 24A 259030</p>	<p>With 10.2 kW heater: 272110 - Elite 272010 - standard</p> <p>With 15.3 kW heater: 272111 - Elite 272011 - standard</p> <p>*Amps 10kW: 230V, 1-ph — 78A 230V, 3-ph — 50A 400V, 3-ph — 34A</p> <p>15kW: 230V, 1-ph — 100A 230V, 3-ph — 62A 400V, 3-ph — 35A</p>
Packages	‡	‡	‡	‡
Operation manual	3A1569	311075	312065	333023
Repair manual	3A1570	311075	312066	333024

*Reactor systems can be wired for all voltages: 230V - 1ph; 230V - 3ph; 400V - 3ph

‡ Basic packages available

Hydraulic (H Series)		
Reactor 2 H-30	Reactor 2 H-40	Reactor 2 H-50
138 bar (2000 psi, 13.8 MPa)	138 bar (2000 psi, 13.8 MPa)	138 bar (2000 psi, 13.8 MPa)
48 bar (700 psi, 4.8 MPa)	41 bar (600 psi, 4.1 MPa)	41 bar (600 psi, 4.1 MPa)
94 m (310 ft)	125 m (410 ft)	125 m (410 ft)
88°C (190°F)	88°C (190°F)	88°C (190°F)
10.5 kg (24 lb)/min	17 kg (37 lb)/min	20 kg (44 lb)/min
10 kW: 247 kg 15 kW: 252 kg	272 kg	272 kg
Yes	Yes	Yes
<p>With 10.2 kW heater: 17H131 - Elite 17H031 - standard</p> <p>With 15.3 kW heater: 17H132 - Elite 17H032 - standard</p> <p>*Amps 10kW: 230V, 1-ph — 79A 230V, 3-ph — 46A 400V, 3-ph — 35A</p> <p>15kW: 230V, 1-ph — 100A 230V, 3-ph — 59A 400V, 3-ph — 35A</p>	<p>With 15.3 kW heater: 230V, 3-ph — 71A 17H143 - Elite 17H043 - standard</p> <p>400V, 3-ph — 41A 17H145 - Elite 17H045 - standard</p> <p>With 20.4 kW heater: 230V, 3-ph — 95A 17H144 - Elite 17H044 - standard</p> <p>400V, 3-ph — 52A 17H146 - Elite 17H046 - standard</p>	<p>With 20.4 kW heater: 230V, 3-ph — 95A 17H153 - Elite 17H053 - standard</p> <p>400V, 3-ph — 52A 17H156 - Elite 17H056 - standard</p>
‡	‡	‡
334945	334945	334945
334946	334946	334946

*Reactor systems can be wired for all voltages: 230V - 1ph; 230V - 3ph; 400V - 3ph

‡ Basic packages available

‡ Basic packages

Most Reactor systems are available in a basic package, which includes:

- System
- Whip hose
- Spray hose
- Choice of gun Fusion® AP, CS, Probler® P2 or Fusion® PC

To order this package, replace the first two part numbers with the gun type. Fusion AP = AP; Fusion CS = CS; Probler P2 = P2; Fusion PC = FP

For example: System 272110 in a basic package with a Fusion AP gun, becomes part number AP2110

‡ Basic packages

Most Reactor systems are available in a basic package, which includes:

- System
- Whip hose
- Spray hose
- Choice of gun Fusion® AP, CS, Probler® P2 or Fusion® PC

To order this package, replace the first two part numbers with the gun type. Fusion AP = AP; Fusion CS = CS; Probler P2 = P2; Fusion PC = FP

For example: System 272110 in a basic package with a Fusion AP gun, becomes part number AP2110

EQUIPMENT FOR COATINGS APPLICATIONS

Graco Has You Covered



BUILD A COMPLETE SYSTEM!

MODEL	Electric (E Series)			
	Air (A Series) A-XP1	E-10hp	E-XP1	Reactor 2 E-XP2
Max Working Pressure	240 bar (3500 psi, 24.0 MPa)	172 bar (2500 psi, 17.2 MPa)	172 bar (2500 psi, 17.2 MPa)	240 bar (3500 psi, 24.0 MPa)
Min Working Pressure	N/A	N/A	N/A	N/A
Max Hose Length	64 m (210 ft)	32 m (105 ft)	64 m (210 ft)	94 m (310 ft)
Max Fluid Temp	88°C (190°F)	77°C (170°F)	88°C (190°F)	88°C (190°F)
Output	5.7 L (1.5 gal) / min	3.8 L (1 gal) / min	3.8 L (1 gal) / min	7.6 L (2 gal) / min
Weight	140.6 kg	108 kg	155 kg	159 kg
Reactor Connect Compatible	No	No	No	Yes
Ordering Information	With 10.2 kW heater: 24Y165 230V, 1-ph — 56A 230V, 3-ph — 46A 400V, 3-ph — 26A	120V 24T100 230V 24T901	With 10.2 kW heater: 230V, 1-ph — 69A 259024 230V, 3-ph — 43A 259033 400V, 3-ph — 24A 259029	With 15.3 kW heater: 272112 - Elite 272012 - standard *Amps 230V, 1-ph — 100A 230V, 3-ph — 59A 400V, 3-ph — 35A
Packages	‡	‡	‡	‡
Operation manual	3A1569	332144	312065	333023
Repair manual	3A1570	332144	312066	333024

*Reactor systems can be wired for all voltages: 230V - 1ph; 230V - 3ph; 400V - 3ph

‡ Basic packages available

Hydraulic (H Series)	
Reactor 2 H-XP2	Reactor 2 H-XP3
240 bar (3500 psi, 24.0 MPa)	240 bar (3500 psi, 24.0 MPa)
83 bar (1200 psi, 8.3 MPa)	59 bar (850 psi, 5.9 MPa)
310 ft (94 m)	125 m (410 ft)
88°C (190°F)	88°C (190°F)
4.8 L (1.25 gal) / min	9.0 L (2.4 gal) / min
252 kg	272 kg
Yes	Yes
With 15.3 kW heater: 17H162 - Elite 17H062 - standard *Amps 230V, 1-ph — 100A 230V, 3-ph — 59A 400V, 3-ph — 35A	With 20.4 kW heater: 230V, 3-ph — 95A 17H174 - Elite 17H074 - standard 400V, 3-ph — 52A 17H176 - Elite 17H076 - standard
‡	‡
334945	334945
334946	334946

1 SELECT A SYSTEM

Choose an air, electric or hydraulic model.

KEY FEATURES:

- Optional data reporting capabilities
- Foam models rated at 138 bar (2000 psi, 13.8 MPa)
- Coatings models rated up to 240 bar (3500 psi, 24.0 MPa)

2 SELECT HEATED HOSES

Choose from pressure ratings of 138 to 240 bar (2000 psi or 3500 psi, 13.8 to 24.0 MPa). Choose 3/8 in or 1/2 in ID.

3 SELECT HEATED WHIP HOSE

Choose from pressure ratings of 138 to 240 bar (2000 psi or 3500 psi, 13.8 to 24.0 MPa). Choose 1/4 in or 3/8 in ID.

4 SELECT A GUN

Choose an air-purge, mechanical-purge or liquid-purge gun with a round or flat pattern.

SELECT SUPPLY PROCESSING EQUIPMENT


5 SUPPLY PUMP

Choose from diaphragm or piston pumps for standard materials in drum-mount or wall-mount. Select a 2:1 or 3:1 piston pump for materials with higher viscosities.

6 AGITATOR KITS

Choose a kit to agitate your resin for a consistent coating. Graco's expandable blade agitators are very low shear to minimize material frothing.

For details on hoses, guns and accessories, see brochure 349104.

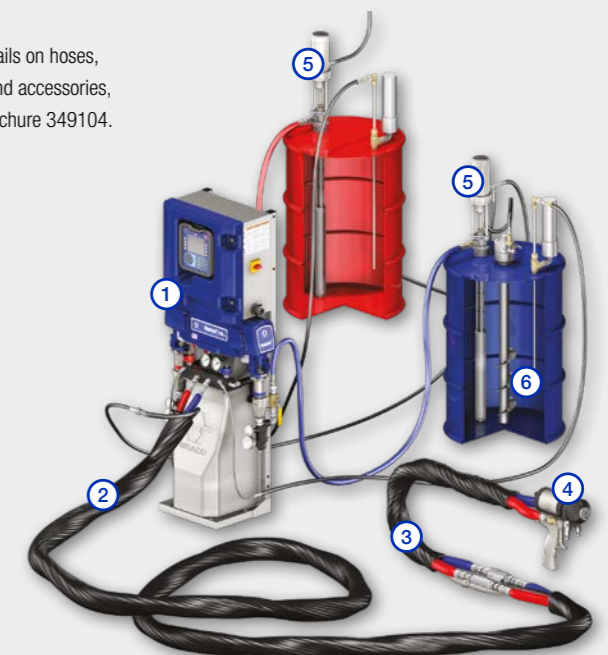

‡ Basic packages

Most Reactor systems are available in a basic package, which includes:

- System
- Whip hose
- Spray hose
- Choice of gun Fusion® AP, Probler® P2 or Fusion® PC

To order this package, replace the first two part numbers with the gun type. Fusion AP = AP; Probler P2 = P2; Fusion PC = FP

For example: System 272112 in a basic package with a Fusion AP gun, becomes part number AP2112

Coating units are not equipped with the Fusion CS gun



ABOUT GRACO

Founded in 1926, Graco is a world leader in fluid handling systems and components. Graco products move, measure, control, dispense and apply a wide range of fluids and viscous materials used in vehicle lubrication, commercial and industrial settings.

The company's success is based on its unwavering commitment to technical excellence, world-class manufacturing and unparalleled customer service. Working closely with qualified distributors, Graco offers systems, products and technology that set the quality standard in a wide range of fluid handling solutions. Graco provides equipment for spray finishing, protective coating, paint circulation, lubrication, and dispensing sealants and adhesives, along with power application equipment for the contractor industry. Graco's ongoing investment in fluid management and control will continue to provide innovative solutions to a diverse global market.

ABOUT AEMCO

AEMCO was established in 2007 as an organization focused to increase professionalism and productivity in the arena of coating and surface preparation across the Kingdom of Saudi Arabia. Latest trends and technologies in coating industry were made available from AEMCO to our professional end users to achieve quality results and satisfaction. We started our operations in Riyadh and expanded to Central, Eastern, Western and Northern Region of the Kingdom.

نبذة عن الشركة:

تأسست شركة إيمكو في عام ٢٠٠٧ لتكون شركة تركز على زيادة الاحترافية والإنتاجية في ميدان الطلاء وتجهيز الأسطح للدهان في المملكة العربية السعودية. وفرت شركة إيمكو أحدث أساليب التقنية في مجال تنفيذ الطلاء لعملائنا المحترفين في صناعة تنفيذ الطلاء للوصول الى نتائج مبهرة ومرضية. بدأنا عملياتنا في الرياض وتطورت لتصل الى المنطقة الوسطى، المنطقة الشرقية، المنطقة الغربية والمنطقة الشمالية من المملكة العربية السعودية.

AEMCO LOCATIONS

RIYADH	DAMMAM	JEDDAH
Second Ring Road, Near Morni, As Sulay, Riyadh:14285, KSA Tel: +966 11 2140888	King Abdul Aziz Road, Opp.DHL Head Office, Thuqba Area , Al-Khobar KSA. Tel: +966 13 8021334	Prince Abdul Majeed Road, North Obhur. Al Shera'a District, Jeddah: 23814, KSA Tel: +966 11 2637048

All written and visual data contained in this document is based on the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice.

AEMCO

+966 -11- 21 40 888
marketing@aemco-llc.com
www.aemco-llc.com

جده الدمام الرياض
Riyadh Damman Jeddah



Genuine People
Genuine Spares
Genuine Service